

MAX-8



COSMEC

MAX-8

Excellent Performances & Reliability

CPCD45T8/CPCD50T8-X

T8 Diesel Forklift 4.5/5.0t

MATERIAL HANDLING EQUIPMENT
www.wijayamachinery.com



CPCD45T8/CPCD50T8-X

T8 Diesel Forklift 4.5/5.0t

General		COSMEC									
1	Manufacture										
2	Model										
3	Power type										
4	Rated capacity										
5	Load center										
6	Lift height										
7	Free lift height										
8	Fork size	L×W×T									
9	Mast tilt range	F/R									
10	Fork overhang(wheel center to fork face)										
11	Rear overhang										
12	Overall dimensions	Length to face of fork									
13		Overall width									
14		Mast lowered height									
15		Mast extended height									
16		Overhead guard height									
17	Turning radius(outside)										
18	Min.right angle stacking aisle wiath (Add load length and clearance)										
19	Travel (No/Full load)										
20	Speed										
21	Lifting (No/Full load)										
22	Max.Drawbar Pull (Full load)										
23	Max.Gradeability (Full load)										
24	Tyres	Front									
25		Rear									
26	Tread	Front									
27		Rear									
28	Wheelbase										
29	Ground clearance	Mast									
30	Frame										
31	Self weight										
32	Weight Distribution	Front									
33		Rear									
34	No load	Front									
35		Rear									
36	Battery	Voltage/Capacity									
37	Modal										
38	Manufacture										
39	Rated output/r.p.m										
40	Rated torque/r.p.m										
41	Engine	No.of cylinder									
42		Borex Stroke									
43	Displacement										
44	Fuel tank capacity										
45	Manufacture										
46	Transmissions										
47	Stage	FWD/RVS									
48	Operating pressure										


1.The parameters in the table are of the standard model. For more information, please contact us.



2.The parameters are subject to change without notice.

Mast Option

4.5/ 5.0t T8 series mast: (pneumatic)

Tpye	Model	Max.fork height	Overall height			Free lift		Front Overhang	Tilt range		Capacity	
			Lowered	Extended		Without backrest	With backrest		FWD	BWD	Load capacity at 500 mm	
				Without backrest	With backrest							
											4.5t	5.0t
		mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	
Wide view mast	2W300	3000	2280	4175	3770	145	145	565	6	10	4500	5000
	2W330	3300	2430	4475	4070	145	145	565	6	10	4500	5000
	2W350	3500	2530	4675	4270	145	145	565	6	10	4500	5000
	2W370	3700	2630	4875	4470	145	145	565	6	10	4350	4800
	2W400	4000	2830	5175	4770	145	145	565	6	6	4250	4750
	2W425	4250	2955	5425	5020	145	145	565	6	6	3800	4250
	2W450	4500	3080	5675	5270	145	145	565	6	6	3150	3500
wide view full 2-stage mast	2F271	2710	2250	3885	3480	1055	1355	565	6	10	4500	5000
	2F300	3000	2395	4175	3770	1200	1500	565	6	10	4500	5000
	2F330	3300	2545	4475	4070	1350	1650	565	6	10	4500	5000
	2F350	3500	2645	4675	4270	1450	1750	565	6	10	4500	5000
wide view full 3-stage mast	3F400	4000	2080	4780	5200	1230	900	578	6	6	4000	4500
	3F435	4350	2195	5130	5550	1345	1015	578	6	6	3800	4250
	3F450	4500	2245	5280	5700	1395	1065	578	6	6	3600	4000
	3F470	4700	2310	5480	5900	1460	1130	578	6	6	3350	3750
	3F500	5000	2460	5780	6200	1610	1280	578	6	6	3150	3500
	3F550	5500	2680	6280	6700	1830	1500	578	3	6	2550	2850
	3F600	6000	2845	6780	7200	1995	1665	578	3	6	1950	2200

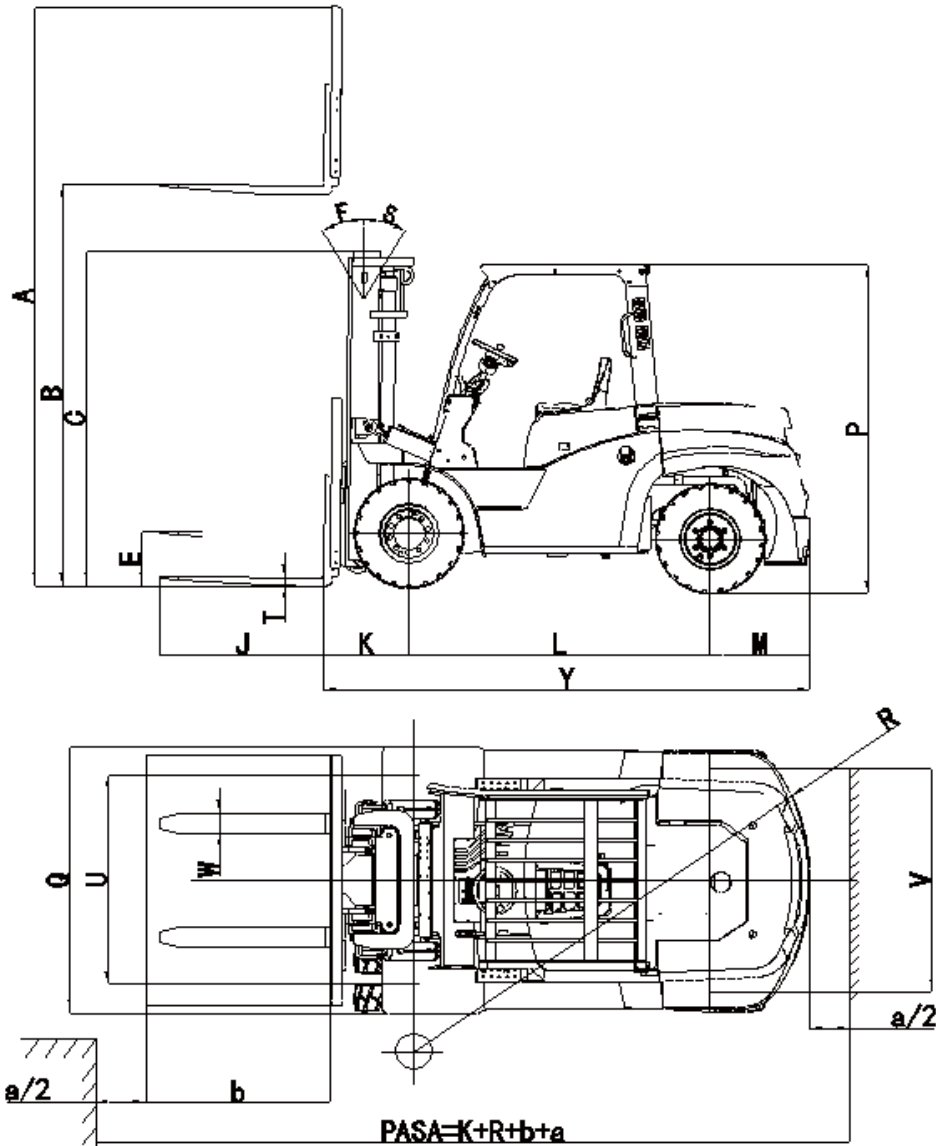

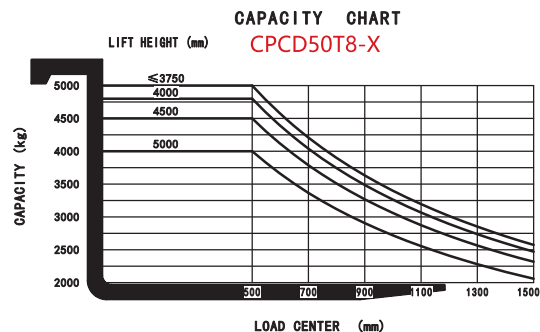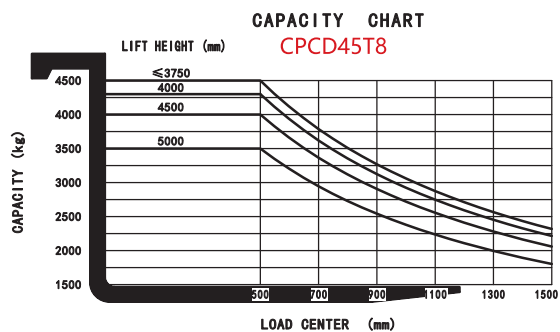

Option

Options		45T8	50T8-X
1	Fork length	○	○
2	Fork extension	○	○
3	Fold fork	○	○
4	Imported diesel engine	○	○
5	High exhaust	○	○
6	Dual air cleaners or special air cleaner	○	○
7	Solid rubber tire	○	○
8	No marking solid tire	○	○
9	Overhead guard	●	●
10	Mast options	○	○
11	Attachments	○	○
12	Integrated side shift	○	○
13	Cabin	○	○
14	Heater	○	○
15	Front windshield with wiper	○	○
16	Rear windshield with wiper	○	○
17	Fan	○	○
18	Cabin without side door	○	○
19	Fire extinguisher	○	○
20	Suspension seat	○	○
21	Front work light	●	●
22	Rear working LED light	○	○
23	OPS system	○	○

Note: ● standard ○ option — NA

